




AMG2924AR Instruction Sheet

**AMG2924AR Rackmount Single Channel Video and RS422/485 Fibre Optic Transceiver
for use on Singlemode Optical Fibre**

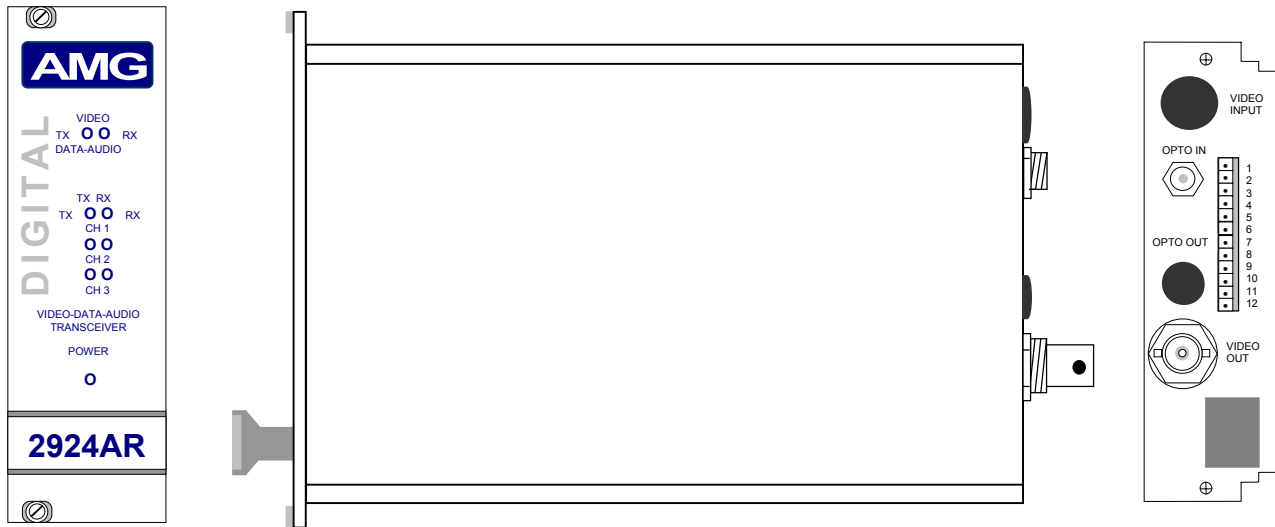

The AMG2924A receives a single video signal over a singlemode optical fibre. It also transmits and receives one bi-directional RS422/485 data signal over the same fibre. It is designed to operate with an AMG2923A or an AMG2923AR Video Receiver.

Video Output Connection

Connectors 75 ohm BNC Socket.
Output Impedance 75 ohm terminated.
Output Level..... 1 volt p-p nominal
Frequency Response..... 10Hz to 5.75MHz min.

Optical Connection

Connector single FC/PC Style
Launch Power..... -10dBm
Wavelength..... 1310nm nominal.

Optical Sensitivity -30dBm
Wavelength..... 1550nm nominal.

Power Connection

Power Supply from plug in connection on AMG2000 subrack

Dimensions

Height..... 3U Plug-in

Width..... 7HP

Depth..... 170mm excluding connectors

Mounting Details

The AMG2924AR is designed to mounted in the AMG2000 Subrack or equivalent

Data Connections

Data Connector..... 12 way removable screw terminal connector (3.5mm spacing)

The RS422/485 Channel transmits and receives on channel 1 using pins 1 to 4 as shown below.
Channel 2 and 3 are not used on the AMG2924AR

Channel	Pin No.	Pin Description
1	1	RS422/485 IN+
	2	RS422/485 IN-
	3	RS422/485 OUT+
	4	RS422/485 OUT-
2	5	Not Used
	6	Not Used
	7	Not Used
	8	Not Used
3	9	Not Used
	10	Not Used
	11	Not Used
	12	Not Used

See daughter below for RS422/485 configuration.

Indicators

Power..... Green – unit powered
Off – no power applied to unit

Video TX..... Not Used

Video RX..... Green – video present on output
Red/Green – optical connection to AMG2923A(R) OK
no video being received
Off – optical loss to AMG2923A(R) too high

Data - Channel 1 only

TXGreen – logic one present on the corresponding data input
Red – data transitions on the corresponding data input
Off – logic zero present on the corresponding data input

This represents the data signals being transmitted on the optical fibre

RXGreen – logic one present on the corresponding data output
Red – data transitions on the corresponding data output
Off – logic zero present on the corresponding data output

This represents the data signals being received on the optical fibre

Configuration of the RS422/485 Data Channel

The RS422/485 data channel can operate in two modes:

Mode 1 – RS422 four wire full duplex transmission. In this mode the AMG2924AR will transmit a tristate condition as well as logic high and low for systems which require bus-ing of the RS422 four wire connection.


Mode 2 – RS485 two wire half duplex transmission.

MODE	Configuration Details	PL3	PL18	PL19
1	RS-422 4 wire Point-to-Point - Not for Rs-422 BUS system	No	No	No
1	Rs-422 4 wire BUS systems	No	No	No
2	RS-485 2 wire BUS	Yes	Yes	Yes


Selection the mode of operation is done with jumpers PL18, PL19 and PL3. When JP20 is fitted the data input connection is 120ohm terminated. When used in RS485 mode or in a RS422 BUS system mode, in order to detect the tristate condition on the input ***the AMG2924AR requires that the bus must be terminated either externally or with the internal jumper.*** If several data inputs are connected in parallel, the 120ohm termination should only be fitted once.

Unless otherwise requested the 2924AR is set up for RS485 two wire operation unterminated on leaving the factory.

MODE 1 – RS422 4 Wire Operation Jumper Settings:

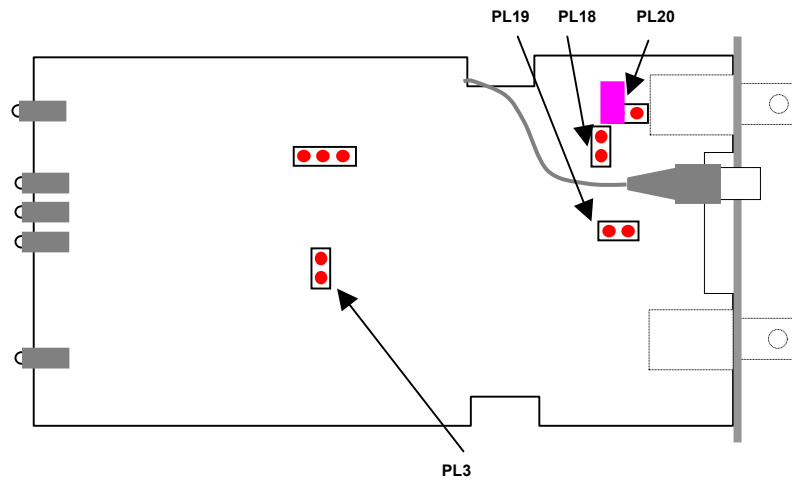

MODE 2 – RS485 2 Wire Operation Jumper Settings:

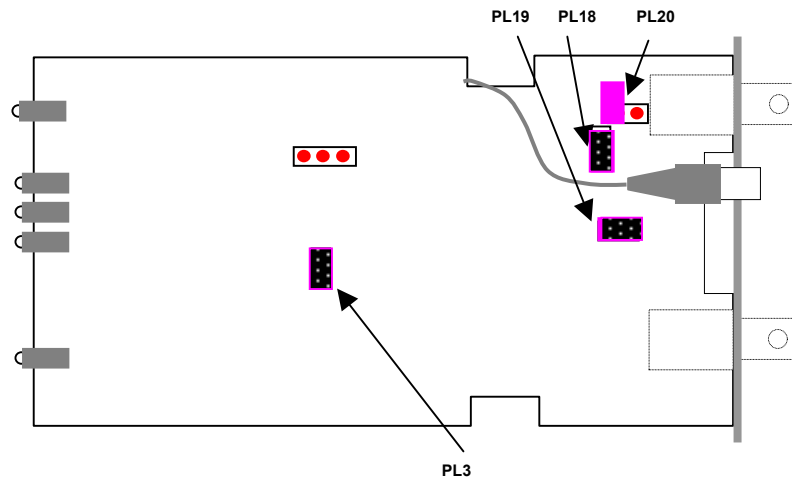

Removal of Main PCB

Remove the main PCB from the housing as follows:

Note:- The 2900's PCB is static sensitive. Handle it with proper care and normal electrostatic Discharge (ESD) procedures. Use properly grounded protection (for example, wrist stamps) when handling the PCB.

- 1.1. Loosen and remove the two screws on the top and bottom of the unit's rear panel.
- 1.2. Ensure that the optical fibre is not trapped.
- 1.3. Slide the rear panel out.
- 1.4. The PCB is attached to the rear panel.

When re-inserting the main PCB into the housing take care not to trap the optical fibre. Fasten the rear panel with the screws.

Safety

The 2900A series of products uses a Class 1 laser system in accordance with EN 60825-2:2000 and as such the optical power emitted from the optical connector is regarded as eye safe under all operating conditions.

However it is always advisable to follow good practice when working with optical fibre systems. This includes:

- Do not stare with unprotected eyes or with any unapproved collimating device at fibre ends or connector faces, or point them at other people.
- Use only approved filtered or attenuating viewing aids

For other safety issues and advice on good practice associated with the optical fibres systems see EN 60825-2:2000 or your local safety officer.

There are no user servicable parts within the AMG2902A.

In case of problem or failure contact your local support centre or AMG Systems Ltd, Technical Support Department on tel. +44 (0) 1767 600777.

See unit data sheet for full specification.