




# AMG2113 Instruction Sheet

## AMG2113 Rackmount Three Channel Video Only Fibre Optic Receiver

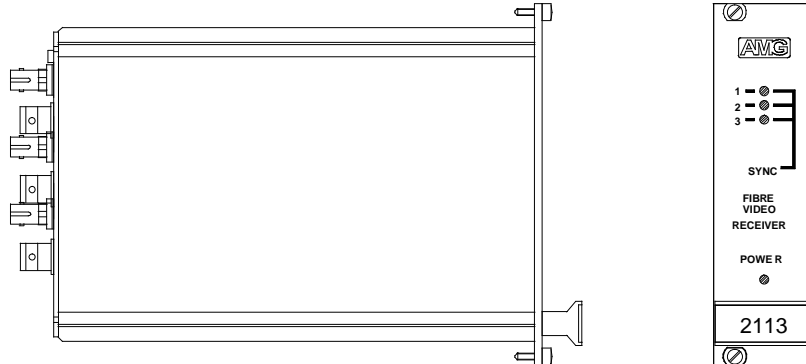

### Video Connection

Connectors ..... 75 ohm BNC Socket – 3 off.  
Output Impedance ..... 75 ohm terminated.  
Output Level ..... 1 volt p-p nominal.  
Frequency Response ..... 10Hz to 10MHz min.

### Optical Connection

Connectors ..... ST Style – 3 off  
Receiver Sensitivity  
    Gain ..... up to –30dBm nominal.  
    No Customer adjustments are available within the unit.  
  
Wavelength ..... 850nm nominal.

### Dimensions

Height ..... 3U  
Width ..... 7HP  
Depth ..... 205mm

### Mounting Details

The AMG2113 plugs into and is powered from the AMG2000 Subrack

### Indicators

Power ..... Green – lit when unit powered  
Video Sync ..... Green – lit when video signal present on optical input.