




## AMG5616 Instruction Manual

### Single Channel Video Receive Unit with one Bi-directional Data Channel and two Uni-directional Alarms for a Multimode Fibre Link

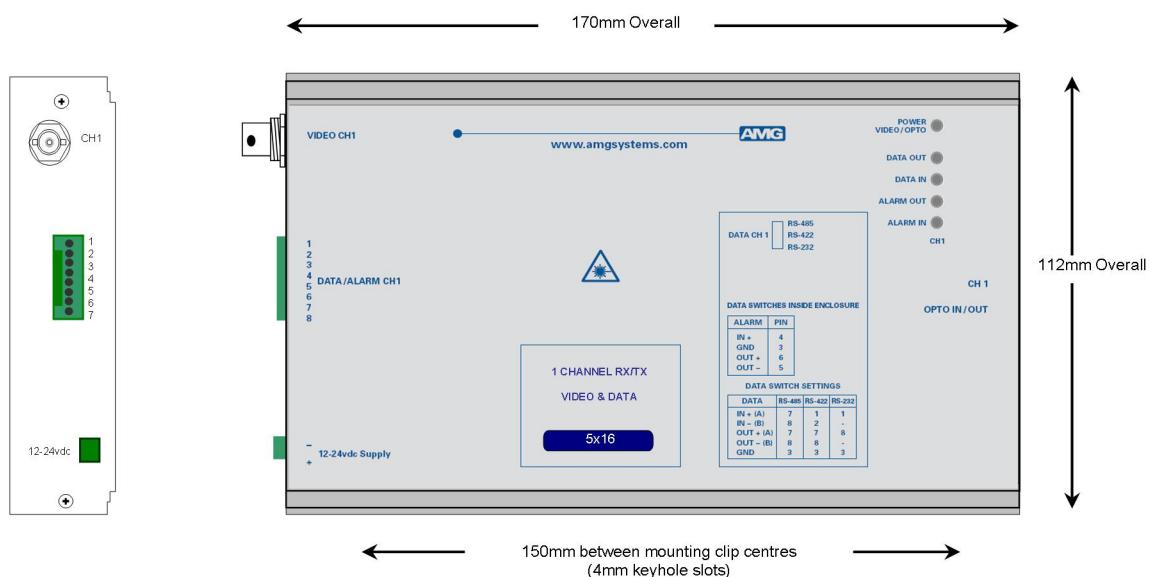

The **AMG5616** is a standalone system designed to receive one video signal and transmit and receive two uni-directional alarms plus one data signal over a Multimode optical fibre.

The **AMG5616** is designed to be powered using an **AMG2001** standalone power supply.

The **AMG5616** is designed to operate with an **AMG5615** standalone video transmit unit in a point to point configuration.

# Contents


<b>Introduction</b>	<b>3</b>
Unit Functional Schematic .....	3
Optical Connection .....	3
<b>Connections</b>	<b>4</b>
Video Output Connections .....	4
Optical Connections .....	4
Power Connection .....	4
Data and Alarm Channel Connections .....	4
<b>Data and Alarm Channel Configuration</b>	<b>5</b>
Data Channel Configuration .....	5
Data Interface Connections .....	6
Alarm Channel Configuration.....	6
Alarm Interface Connections .....	6
<b>Front Panel Indicators</b>	<b>7</b>
Power LED .....	7
Low Speed Data LEDs .....	7
Alarm LEDs.....	7
<b>Physical Information</b>	<b>8</b>
Dimensions .....	8
Mounting Details .....	8
Removal / replacement from / to the Case .....	8
<b>Safety</b>	<b>8</b>
<b>Maintenance and Repair</b>	<b>8</b>

## Introduction

### Unit Functional Schematic


The **AMG5616** receives 1 video signal plus 1 data and 2 uni-directional alarm signals from an **AMG5615** transmit unit.

It also transmits 1 data signal to a **AMG5615**.

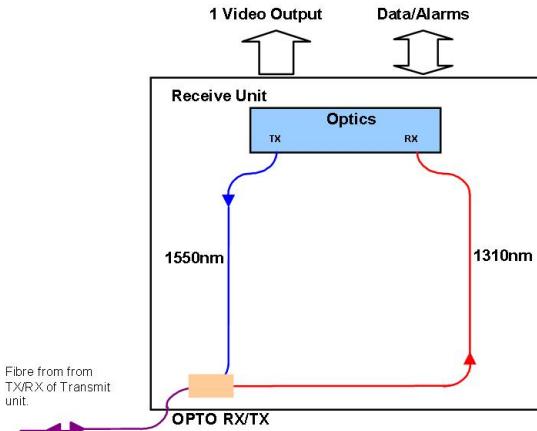

### Optical Connection

The **AMG5616** connections are illustrated in the following example which shows an **AMG5615** single channel transmit unit together with a **AMG5616** configured as a point to point system.

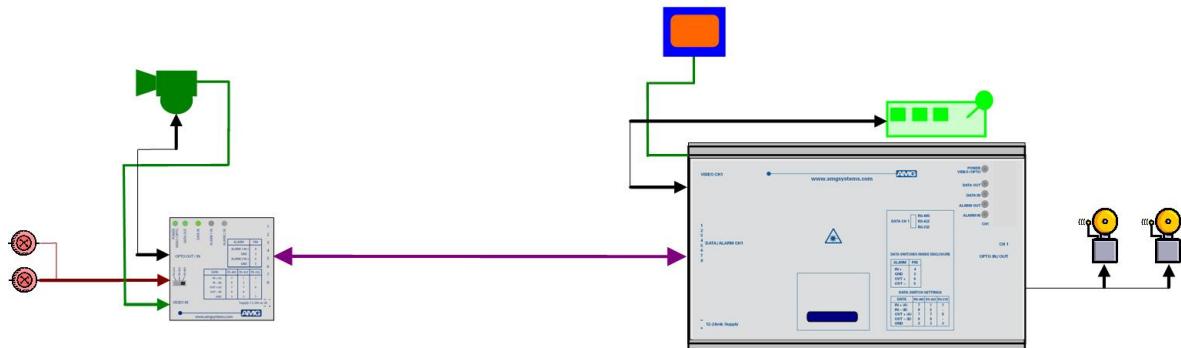

## **Connections**

---

### **Video Output Connections**

Connectors..... 75 ohm BNC Socket.  
Output Impedance ..... 75 ohm terminated.  
Output Level..... 1 Volt p-p nominal  
Frequency Response..... 10Hz to 7MHz.

### **Optical Connections**

#### **OPTO IN/OUT**

No. of Optical Connections ..... 1 per video channel  
Connector..... SC/PC  
Primary Optical Launch Power ..... -15dBm  
Transmit Wavelength ..... 1550nm  
  
Primary Optical Sensitivity ..... -34dBm  
Receive Wavelength ..... 1310nm  
  
Optical Fibre..... Multimode 50/125 or 62.5/125\*\*

\*\*Note: the transmission distance is limited by the bandwidth of the Multimode optical fibre. The optical data rate is 155Mbits/s, which may restrict operation to a maximum fibre length of 7km, although in most cases the units will operate successfully over longer fibre lengths. It is advisable however for distances greater than 7km, to have the optical fibre tested.

### **Power Connection**

Connector Type ..... Removable 2-pin, 3.81mm, Screw Terminal  
Connector Partno..... Phoenix 1803578  
Supply Voltage..... +12 to +24 Volts DC  
Maximum Power ..... 2.5 Watts


### **Data and Alarm Channel Connections**

No. of Data Channels..... 1  
No. of Alarms ..... 2  
  
Connectors..... Removable 8-pin, 2.5mm, Spring Terminal  
Connector Partno..... Phoenix 1881383  
  
Data Interfaces..... RS-232, RS-422 or R-S485. Selected by slide switch inside enclosure. \*See appropriate section on how to remove the case for access to the data switches  
  
RS-485 – Switch Position - Top  
RS-422 – Switch Position - Middle  
RS-232 – Switch Position - Bottom  
  
Alarm Outputs ..... Solid-state Relay, maximum 150mA at 125Vac/dc, Ron < 6.5Ω

## Data and Alarm Channel Configuration

The **AMG5616** sends and receives data to/from an **AMG5615** single channel standalone transmit unit. The physical data interface RS-485, RS-422 or RS-232 is individually selectable by the user with the corresponding slide switch mounted on the main PCB inside the enclosure.

2 uni-directional alarms are also provided, each of which can receive an on/off signal from an **AMG5615** and are typically used to convey contact closure status. Each alarm output uses a Solid-state relay, with a maximum load current of 150mA at 125Vac/dc and  $R_{on} < 6.5\Omega$ .

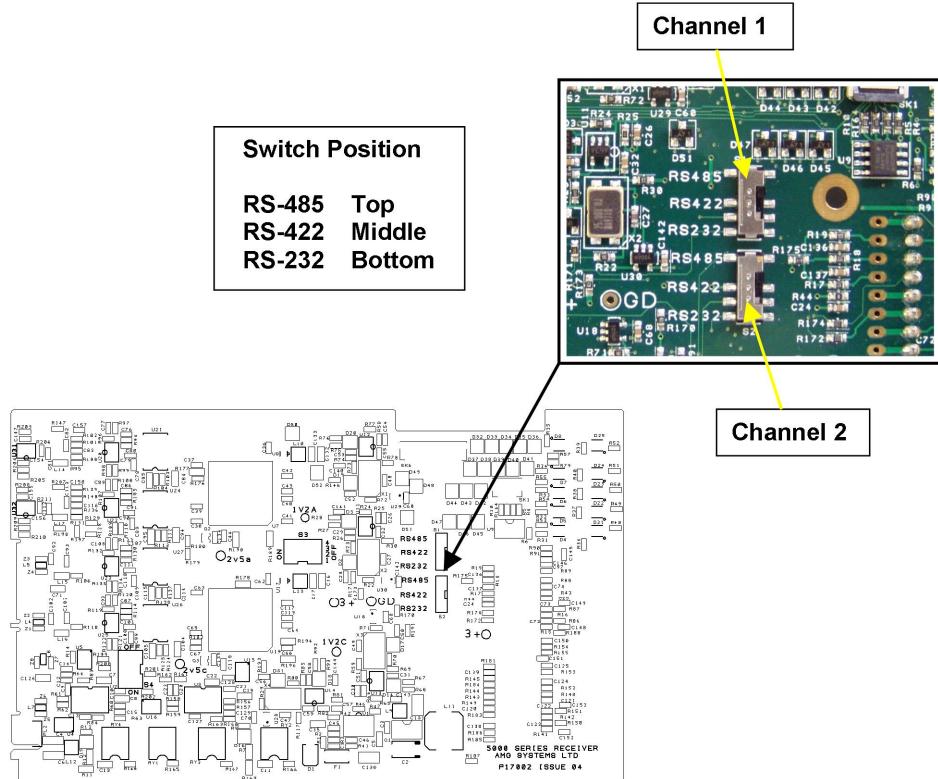

### Data Channel Configuration

Each low speed data channel provides an RS-232, RS-422 (full duplex, four wire) or RS-485 (half duplex, two wire) interface defined by the corresponding mode switch inside the enclosure. Every data channel as shipped from the factory is set up for RS-485 operation unless otherwise requested.

The data input for both the RS-485 and the RS-422 modes detects a tri-state input condition by monitoring the differential voltage level across the input. A differential level below 600mV positive or negative will be detected as a tri-state condition. A level above 600mV positive or negative will be detected as a logic 1 or logic zero respectively. It is important therefore to terminate the RS-485 bus or the RS-422 input bus using  $120\Omega$  if a pre-bias is present on the RS-485 or RS-422 bus.

A large number of third party equipment manufacturers apply a pre-bias on their RS-485 bus. This pre-bias is applied by pulling one arm of the RS-485 bus high (+5 volts) and the other arm low (0 volts) using high value resistors within the third party equipment. In order to ensure that the AMG equipment detects a tri-state condition, then these resistors should have a value above  $5k\Omega$ . If the third party bias resistors are less than  $750\Omega$  the bus can be multiple terminated as required to ensure that a tri-state level is detected.

The system detects a tri-state input condition on a data channel bus when in RS-485 or RS-422 mode.

## **Data Interface Connections**

### **Data Channel**

Connector Pin No.	Data Channel		
	RS-485 [switch top]	RS-422 [switch middle]	RS-232 [switch bottom]
1		IN + (A)	IN
2		IN - (B)	
3	GND	GND	GND
4			
5			
6			
7	IN/OUT + (A)	OUT + (A)	
8	IN/OUT - (B)	OUT - (B)	OUT

Note: (A) or (B) in brackets in the above table refers to RS-485 / RS-422 data specification.

### **Alarm Channel Configuration**

The **AMG5616** provides 2 uni-directional alarm outputs.

Each alarm output provides a set of contacts from a solid state relay.

**Alarm output 1** : provides a pair of normally open, volt-free contacts.

**Alarm output 2** : provides a normally open, switched contact to Ground (0V / GND).

### **Alarm Interface Connections**

Connector Pin No.	Alarm Interface	
	Alarm 1	Alarm 2
1		
2		
3		ALARM 2 GND
4		ALARM 2 OUT +
5	ALARM 1 OUT -	
6	ALARM 1 OUT +	
7		
8		

## **Front Panel Indicators**

---

### **Power LED**

Power / Video / Opto.....	Green	-	Video present & Opto sync.
	R/G	-	Opto sync. but no Video present.
	Red	-	Unit powered, but no Opto sync.
	Off	-	No power applied to unit.

### **Low Speed Data LEDs**

Data Present IN (RS485 or RS422) ....	Green	-	logic zero (+V, -V) present on IN+, IN-
	Red	-	logic one (-V, V+) present on IN+, IN-
	Off	-	tri-state off or no connection on IN+, IN-
Data Present IN (RS232).....	Green	-	logic zero (+V) present on input IN+
	Red	-	logic transitions present on input IN+
	Off	-	logic one (-V) present on input IN+

IN corresponds to the data signals being transmitted onto the optical fibre.

Data Present OUT (RS485 or RS422)	Green	-	logic zero (+V,-V) present on OUT+, OUT-
	Red	-	logic one (-V,+V) present on OUT+, OUT-
	Off	-	tri-state off or no connection on OUT+, OUT-
Data Present OUT (RS232).....	Green	-	logic zero (+V) present on OUT+
	Red	-	logic transitions present on OUT+
	Off	-	logic one (-V) present on OUT+

OUT corresponds to the data signals being received from the optical fibre.

### **Alarm LEDs**

ALARM 1 OUT .....	Green	-	Alarm ON / Contacts closed.
	Off	-	Alarm OFF / Contacts open.
ALARM 2 OUT .....	Green	-	Alarm ON / Contacts closed.
	Off	-	Alarm OFF / Contacts open.

## **Physical Information**

---

### **Dimensions**

Height..... 112mm  
Width..... 170mm (excluding connectors)  
Depth..... 35mm  
Weight..... 500grams

### **Mounting Details**

The AMG unit is supplied with a clip-on mounting bracket which should be attached to a panel or wall using 2 off 4.0mm screws, see diagram on page 1 for dimensions. The unit is clipped into the mounting bracket, and is then held firmly in position.

### **Removal / replacement from / to the Case**

Note: - The AMG unit PCB is static sensitive. Handle with proper care and use normal electrostatic discharge (ESD) procedures. Use properly grounded protection (for example, wrist straps) when handling the PCB out of the case.

To remove the PCB from the case for example to access a Low Speed Data mode switch, remove the 2 fixing screws on the rear panel and slide the PCB sufficiently out of the case to enable access to the switch.

To replace the PCB into the case, slide the PCB gently into the case, if necessary aligning the board with the appropriate slots.

## **Safety**

---

AMG Optical Fibre Products use Class 1 laser systems in accordance with EN 60825-2:2000.

It is always advisable to follow good practice when working with optical fibre systems. This includes:

- Do not stare with unprotected eyes or with any unapproved collimating device at fibre ends or connector faces, or point them at other people.
- Use only approved filtered or attenuating viewing aids

For other safety issues and advice on good practice associated with optical fibre systems, please see EN 60825-2:2000 or your local safety officer.

## **Maintenance and Repair**

---

There are no user serviceable parts within AMG products. See unit data sheet for full specification.

In case of problem or failure, please call your local support centre or contact: **AMG Systems Ltd.** at 3 The Omega Centre, Stratton Business Park, Biggleswade, Beds., SG18 8QB, UK.

Phone	+44 (0) 1767 600 777
Technical support	+44 (0) 1767 604 491
Email	<a href="mailto:techsupport@amgsystems.com">techsupport@amgsystems.com</a>