

/ INTERFACE CONNECTIONS




① Remove the dust caps from the RJ45 and SFP ports of the ports that are to be connected.

② Insert the SFP module into the SFP slot.

③ Insert the Cat5/6 cable into the RJ45 port.

④ Insert the fibre patch cable into the SFP module.

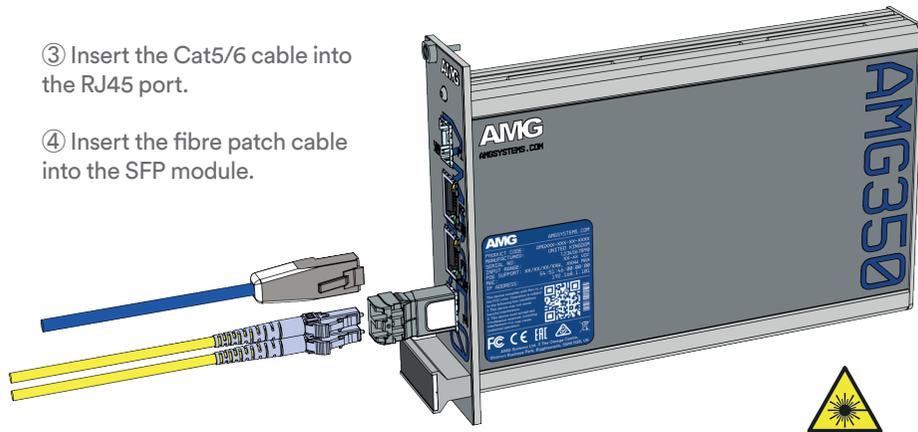


/ PORT SPEEDS

Example part code:

AMG350R-2G-2S

Character	RJ45 Port Speed	SFP* Port Speed
F	10/100 Base-T(X)	100/1000 Base-FX
G	10/100/1000 Base-T(X)	


*SFP's supplied separately. Refer to AMG SFP Datasheet for available models

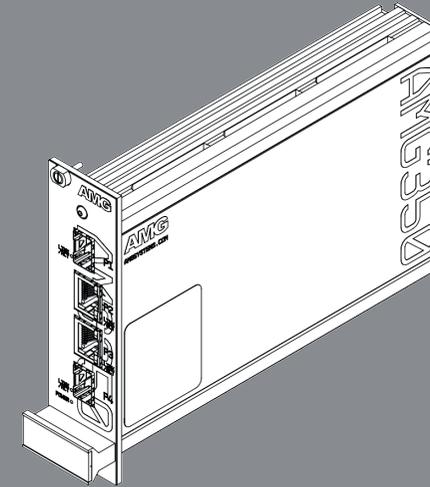

AMG350R Series Rack Mount Unmanaged Switch

Installation Manual - Hardware


/ AMG350R SERIES MODELS

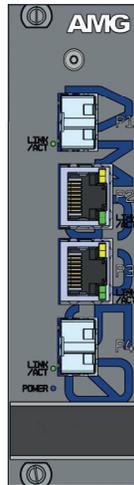

2+2

2+2 Industrial Rack Mount Unmanaged Ethernet Switch with 2 x RJ45 and 2 x SFP Ports

/ 1U RACK MOUNT INSTALLATION (AMG2031)

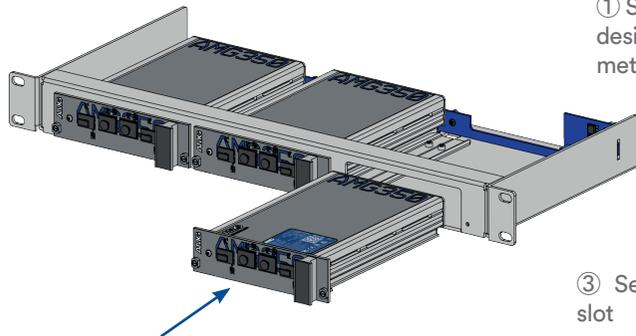


① Slide the unit into the desired slot using the metal guides as shown.

② Ensure the unit connects firmly into the power connector on the rack backplane.

③ Secure the unit into the slot using the two fixing screws on the front panel.

/ 3U RACK MOUNT INSTALLATION (AMG2015 & AMG2015-DR)

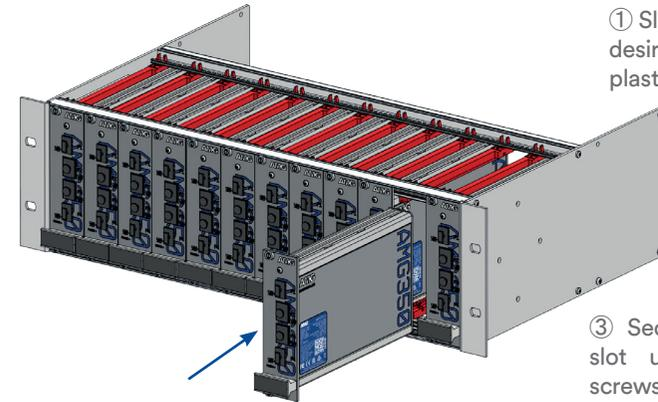


① Slide the unit into the desired slot using the plastic guides as shown.

② Ensure the unit connects firmly into the power connector on the rack backplane.

③ Secure the unit into the slot using the two fixing screws on the front panel.

/ LED INDICATORS

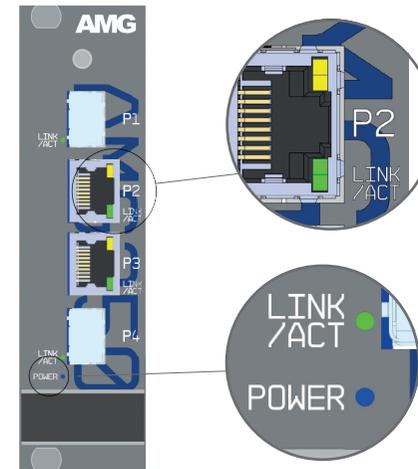

LED	Colour	Description
POWER	Blue	DC input present from the rack
SFP LINK/ACT	Off	No SFP link connection
	Green	SFP link present (flashes with data traffic activity)
RJ45 LINK/ACT	Off	No Ethernet link connection
	Green	Ethernet link present (flashes with data traffic activity)